

## PRINT DATA SHEET



Acrobat 8 (PDF 1.7)

Recommended software for design creation: Adobe Illustrator



CMYK or greyscales in 8 Bits Channel.

RGB colors are automatically converted to CMYK



All fonts must be converted to paths or be embedded

At least 8 mm font height



Minimum resolution in 1:1 format:150 dpi,



Use this color for deep black:

Backlit: CMYK 75/75/75/100




Do not apply crop, bleed or registration marks



Files are produced as received. If the artwork contains Pantone colors, they must be marked in the file and communicated to us prior to production. Even when Pantone colors are followed, the final appearance may vary due to lighting conditions.



Our team does not make any edits to customer files. If any manipulation or changes are required, the customer assumes full responsibility, and this may result in variations in color and overall appearance.

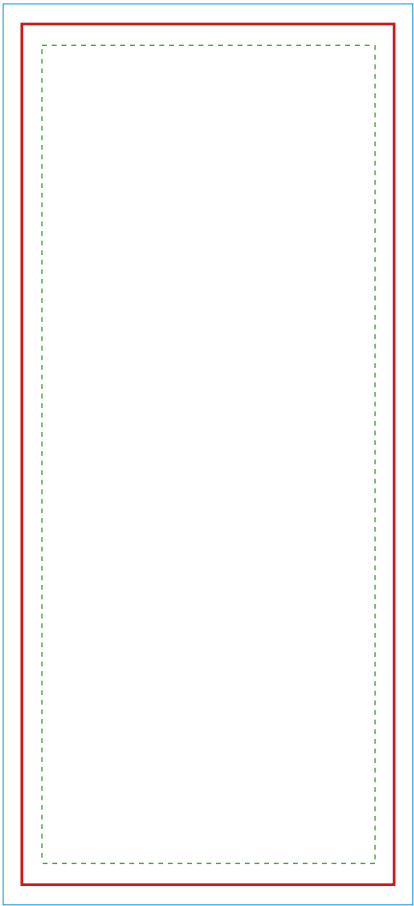

-  **Data format**  
1.2" bleed
-  **Final format/  
Frame format**
-  **Safety distance**  
1.2" safety distance  
from the final format

In the case of continuous graphics over several frames, it is essential to create the graphic file as a whole.

Note on the finishing of the rubber lip:  
During finishing, it is essential to ensure that the rubber lip is sewn on the side of the printed image.

Final format/Frame format      Data format incl. 1.2" bleed

**Frontside**

|                     |                     |
|---------------------|---------------------|
| 35.90 in x 94.96 in | 37.10 in x 96.16 in |
|---------------------|---------------------|

**Backside**

|                     |                     |
|---------------------|---------------------|
| 39.37 in x 98.42 in | 40.57 in x 99.62 in |
|---------------------|---------------------|

